

ELECTRICAL TAPPING MACHINE

www.go-tap.es

GOTAP

by GO-TAPping, S.L.



MOD. REV M12

MOD. REOM12



Machine features

Overview

The RE-M12 servo electric tapping machine is suitable for threading from M2 to M12 in almost all types of material. The suspension operation and the possibility of making right-hand and left-hand threads allow for safe, flexible, and convenient threading. The arm is made of extra strong hard aluminium, which prevents deformation and the force control with an alarm system ensures safe threading and presents a much more efficient machine than traditional ones with much lower energy consumption.

Operation of the machine via a touch screen ensures ease of use and simple programming for the operator, without the need for specialist knowledge. The machine can be operated in automatic or manual mode and the speed range is from 0 to 660 rpm freely variable with no steps for a suitable adjustment according to thread type and material.


INFO

Video in action

REV



REO

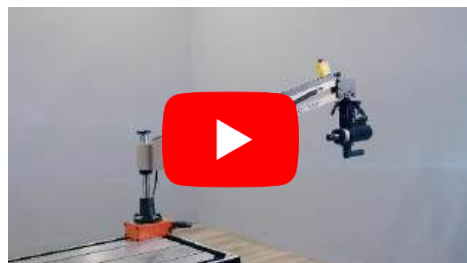

Contact us for a detailed quotation!

Contact us for any enquiries, requests, or questions!

CONTACTO

Description

Technical characteristics:

- Tapping capacity:
M2 to M12 (stainless steel)
M2 to M14 (steel)
M2 to M16 (aluminium)
- Rotational speed: 0 – 660 RPM
- Work area: REV – 1045 mm, REO – 1050 mm.
Height adjustable – 500 + 310 mm.
- Voltage: 220-230V 50hz – optional 110V 60hz
- Consumption: 600W
- Torque: 31 Nm
- Weight: 23 kg (REV), 24 kg (REO).

Standard equipment:

- Touch screen control panel - digital program in English or Spanish + manual tapping + automatic tapping + depth measurement + thread counter + + step tapping + torque control
- Servo-motor and driver integrated in threading arm
- Quick change chuck Ø19.
- Reinforced duraluminium swing arms
- Table mounting column

Optional equipment:

- T-slotted table 900x600mm - With 2 drawers and cupboards
- Multitasking table with mooring elements, chip collector tray, and shelf
- Portable magnetic base 300 kg.
- Higher table mounting column 600 mm.
- Case with 6 tap adapters with clutch for M12, M10, M8, M6, M5, M4.
- Tapa adapter with safety clutch for taps in metrics, BSP, BSW, UNC, UNF, NPT EN NORMA DIN O ISO

Specifications

General characteristics

Model	Tapping capacity	Speed (RPM)	Work area (mm)	Tapping head	Alimentación Power supply	Consumo	Peso
REV-M12	M2-M12	0-660	1045	Vertical	220V 50Hz	600 W	23 Kg
REO-M12	M2-M12	0-660	1050	Multiposition	220V 50Hz	600 W	24 Kg

Components


On receipt of the machine, check that you have received the following components.

Description	Quantity
Electrical tapping machine set	1
Power cable	1
Hexagonal key M8	1
Quick change chuck B12 Ø19mm	1
Instruction manual	1

Optional accessories

Description	Quantity
Tap adapters M4 to M14 + M16 special	1 set
Work table	1
Megnatic base 300 kg	1

AREA DE TRABAJO LAYOUT WORKING AREA

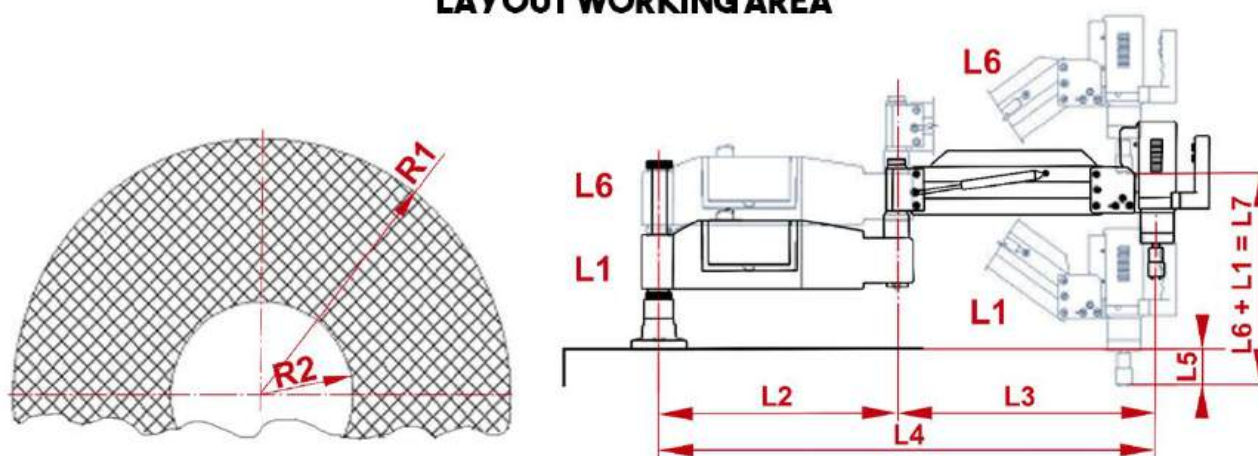

MOD.RE	R1	R2	L1	L2	L3	L4	L5	L6	L7
M12/16	1045	330	130	500	545	1045	75	433	563

Guarantee

GO-TAP electric tapping machines are guaranteed for 2 years. The machine warranty covers for 2 years, any manufacturing defect, not of misuse, that the components of the machine may present. Labour and travel expenses for any replacement are not included in this warranty.



Worldwide shipping

The customer is always responsible for the transport to the final destination of the tapping machine. It is also possible for the customer to contract the transport themselves with their own reliable agency or ask us to include shipping cost in the invoice.

Technical service

All our customers have access to technical support quickly and efficiently. 90% of incidents are resolved by telephone, email, Skype or videoconference within 24 hours. If you need on-site technical assistance, we will send a technician to your premises.

Síguenos en    

Go-Tapping, S.L.
C/ Nueva, 6 5ºc
E-20150 Villabona Spain
Tel: +34 943 56 11 35
Email: go-tap@go-tap.es
www.go-tap.es
